

EXCAVATOR MULCHERS

PML/EX



from 30 to 50 HP



Ø5 cm max



from 5,5 to 7,5 t

MULCHER WITH HAMMER/FLAIL ROTOR FOR EXCAVATORS.

This mulcher can be equipped with a standard 27cc motor or an optional 38cc motor to mount to excavators ranging from 5.5 to 7.5 tons. There is also an optional 17/34cc variable manual displacement hydraulic motor with mechanical adjustment that makes this model ideal for any excavator.

The flow control valve ensures an easy and rapid mounting of the mulcher without adjustments or modifications to the hydraulic system of the excavator.




STANDARD EQUIPMENT

- Anti dust machine body
- Belt transmission
- 27cc gear motor with integrated anticavitation valve
- Hydraulic hoses
- Flow control system valve (only with 27 cc and 38 cc motors)
- Rear hood with mechanic adjustment
- Welded counter blade
- Rear roller
- Possibility to have the rotor equipped with PML hammers or Y-flails

OPTIONS

- 38cc gear motor with integrated anticavitation valve
- 17/34cc variable manual displacement hydraulic piston motor with relief and anticavitation valve
- Customized attachment bracket with pins
- Attachment plate with self levelling device
- Different teeth

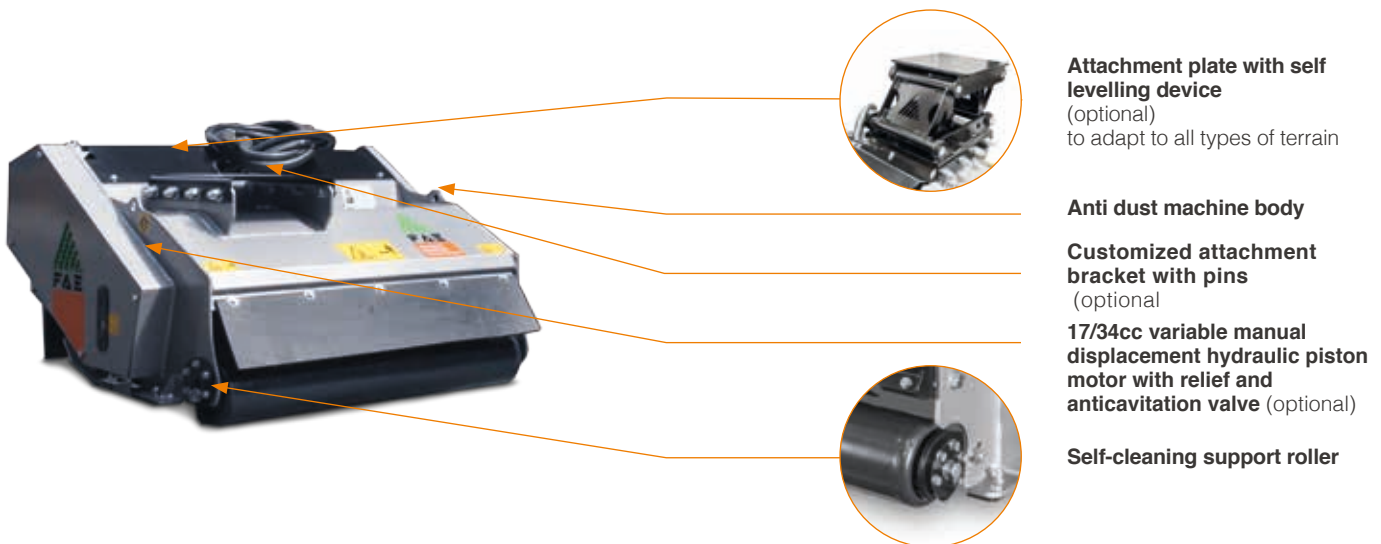

MODEL	Power (HP)		Flow rate (L/min)		Pressure (bar)		Excavator weight (t.)		Working width (mm)	Weight (kg)	Max shredding diameter (mm)	No. teeth	
	min	max	min	max	min	max	min	max				PML	Y
PML/EX 100	30	50	35	85	180	210	5,5	7,5	1015	290	50	16	16
PML/EX 125	35	50	35	85	180	210	6,0	7,5	1255	320	50	20	20
PML/EX 150	40	50	35	85	180	210	6,5	7,5	1495	350	50	24	24

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.